

T5 SLB (Staggered Link Batten)

Display lighting



- The T5 SLB (Staggered Link Batten) is available either switched or dimmable with DSI, DALI or 1-10v protocols.
- Quick and easy installation.
- Eliminates shadows and dark spots.



Please see overleaf for installation and maintenance advice.

Incorrect wiring/programming will invalidate all warranties. Coloured sleeves are optional. Please note coloured sleeves are not recommended for use on HO Lamps.

T5 SLB (Staggered Link Batten)

Display lighting




TECHNICAL INFORMATION

LAMP

T5 triphosphor colour 840 as standard, other colour temperatures to order. Typical lamp life T5 20,000 hrs, longer life lamps available as cost option.

FIXING

2 screws through the fitting, (not included).

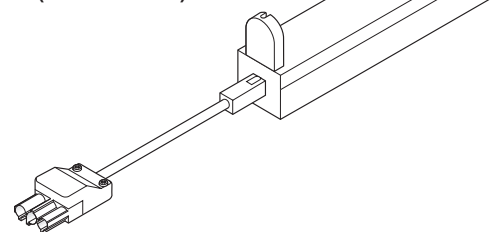

COLOURS

Any lamp colour or our DDP coloured sleeves (guaranteed fade free) can be specified. Ice blue, sky blue, royal blue, purple, lavender, candy pink, pink, light red, red, orange, light orange, chrome green, leaf green, acid yellow and candlelight. Other filter colours available but not guaranteed fade free.

CONSTRUCTION

Powder coated white steel box section, HF electronic ballast.

WIRING AND CONNECTIONS

All internal wiring 1mm and 1.5mm solid. External wiring if supplied 1.5mm three core PVC.

OPERATION TEMPERATURE

-20°C – +50°C Please note lamps will run at reduced light output in colder temperatures. T5 lamps require a minimum +10°C for dimming.

STANDARDS

Complies with CE for Europe. Class 1 product, Covers EMC/LV requirements, CE WEEE and ROHS compliant Ballast EN61347, EN 55015, EN60929 EN61547 EN 61000-3-2.

VOLTAGE

220v-240v AC 50-60Hz, Start up amps 0.98 operating amps 0.07-0.30 dependant on wattage.

Allow 100mm overlap when using more than one unit. Width 75mm and height 63mm.



For dimmable option, add protocol version 1-10v, DSI or DALI to product code.

T5 SLB (Staggered Link Batten)	
Product Code	Overall Length
SLB 14w	1050mm
SLB 21w	1650mm
SLB 28w	2250mm
SLB 35w	2850mm

T5 SLB (Staggered Link Batten) HO Version	
Product Code	Overall Length
SLB 24w	1050mm
SLB 39w	1650mm
SLB 54w	2250mm
SLB 49w/80w	2850mm

Incorrect wiring or programming will invalidate all warranties.

For Product support Freecall 1800 733 113 or Email info@yld.com.au