


T5 Seamless link batten Display Lighting



- Avoids dark spots between fittings.
- Perfect for long runs where continuous light is required.
- Currently available in HO only 24w 39w 54w.
- Switched version 24w 39w and 54w.
- Dimmable, DALI or 1-10v 39w and 54w only. 24w not dimmable.
- Simple and secure plug together design, requires power supply lead.
- Dimensions: Height 59mm, Width 40mm
Lengths 24w 583mm, 39w 883mm, 54w 1183mm.
- Class 1 earthed, fixed luminaire, IP20, 230-240v 50Hz choice of col830 or col840 lamps.
- Designed for operation in ambient temperatures of 25°C.
- Standards EN60598 (IEC598) EN55015.

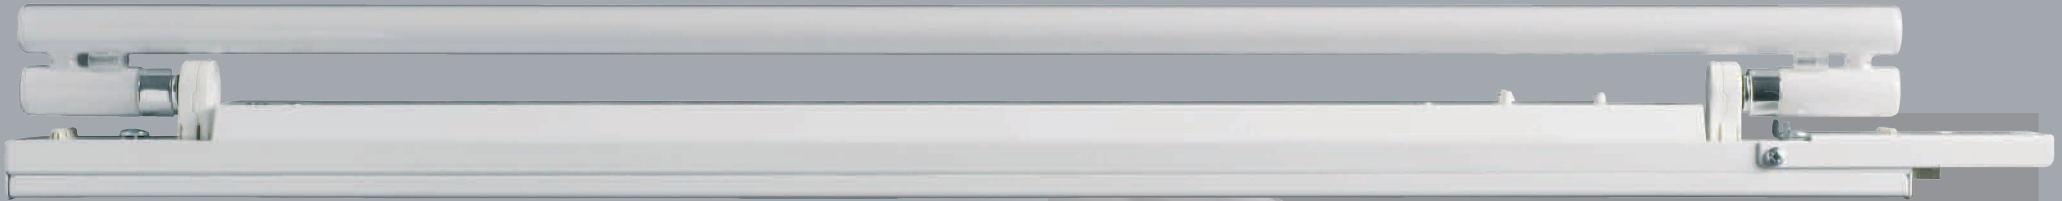

Incorrect wiring/programming will invalidate all warranties.

Emergency conversion 54w switched version only not available for dimmable version.

Please see over for installation and maintenance advice.

T5 Seamless Link Batten Display lighting

TECHNICAL INFORMATION

LAMP

T5 triphosphor colour 840 as standard, other colour temperatures to order.

FIXING

2 screws through the fitting, (not included).

CONSTRUCTION

Powder coated white steel box section, HF electronic ballast.

WIRING AND CONNECTIONS

All internal wiring 0.5mm and 1.5mm solid. External wiring if supplied 1.5mm three and five core PVC.

OPERATION TEMPERATURE

-20c – +50c Please note lamps will run at reduced light output in colder temperatures. Dimmable version requires +10°C operating temperature.

STANDARDS

Complies with CE for Europe. Class 1 product, Covers EMC/LV requirements, CE WEEE and ROHS compliant Ballast EN61347, EN 55015, EN60929 EN61547 EN 61000-3-2.

VOLTAGE

220v-240v AC 50-60Hz, Start up amps 0.98 operating amps 0.07- 0.30 dependant on wattage.

INSTALLATION

Batten can be quickly and simply screwed to mounting surface with the lamp removed.

RE-LAMPING

Simply roll lamp over 90° and lift out.

